EzRay Air W

CARBON NANO TUBE

The wall-mounted EzRay Air Wall is a lightweight X-ray device designed for easy handling and stable positioning for optimal image quality on your intraoral X-rays. The EzRay Air Wall's lightweight tube head provides users with a stable and easy-to-use X-ray source which maximizes image clarity and optimizes workflow.





ONE SMART DIAL


The operating panel, located on the tube head of EzRay Air Wall, creates a much simpler and faster workflow. Dentists who use the Smart Dial will immediately notice a decrease in preparation time. There will be no need to remember complicated control buttons and configurations.

LIGHTWEIGHT INTRAORAL X-RAY WITH NO OIL

EzRay Air W

SECURE CLEAR IMAGES WITH A 0.4MM FOCAL SPOT

The EzRay Air Wall automatically adjusts the exact exposure parameters according to the angle of the tube, which reduces the time needed to take the image. Regardless of which intraoral sensor you use, the EzRay Air minimizes blur and provides additional diagnostic value with a 0.4mm focal spot.







SPECIFICATIONS

Focal Spot	0.4 mm (IEC 60336)	**Arm Length**	450/600/900mm *See note A	**Exposure Time Range**	0.05 ~ 0.5 (0.01s increment)
Tube Voltage	65 kV	**Accessories**	Remote Exposure Switch (Hand Switch / Doorbell Switch)	**Source to Skin Distance**	Min. 20 cm
Tube Current	3.0 mA	**Weight**	15.9 kg (Arm Length 450 mm)	**X-ray Field**	Default: : 60 mm Round, 30x40 mm Rectangular / Optional: 20x30 mm Rectangular

DIMENSIONS

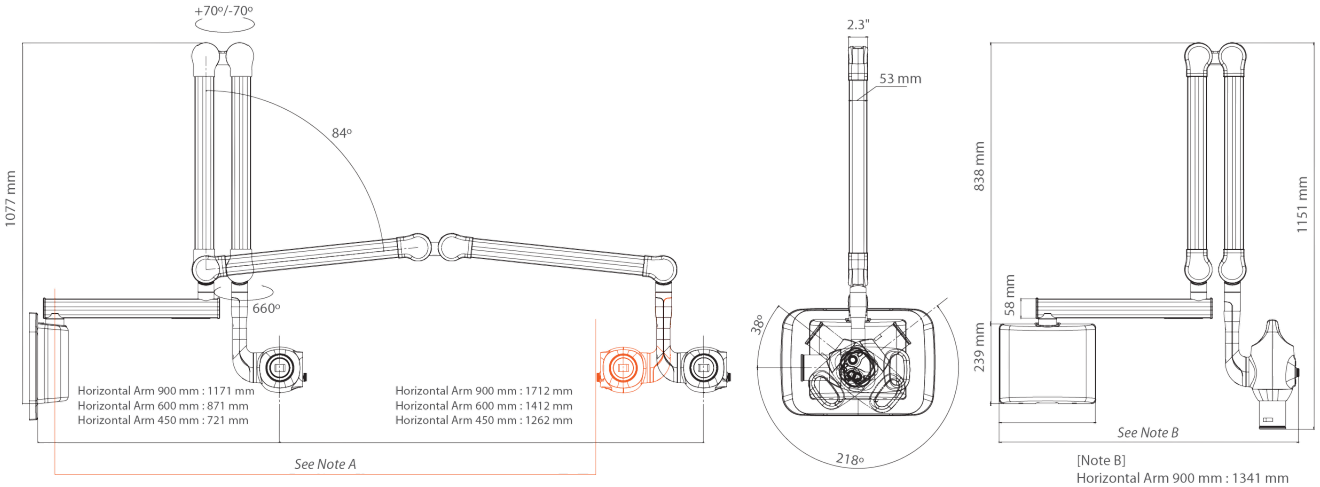

[Note A]
450 mm Horizontal Arm 1585 mm / 600 mm Horizontal Arm 1735 mm / 900 mm Horizontal Arm 2035 mm with 203 mm cone

[Note B]
Horizontal Arm 900 mm : 1341 mm
Horizontal Arm 600 mm : 1041 mm
Horizontal Arm 450 mm : 891 mm

vatech